Instaliranje eSIM (a) na Apple uređaju

Ovaj vodič za pomoć vodi vas kroz korake potrebne za instaliranje eSIM-a na Apple uređaju, vodič je kreiran pomoću najnovije verzije Apple softvera dostupnog u to vreme, IOS KSNUMKS

Postoje dve opcije instalacije koje se nude u ovom vodiču za pomoć, ili "***instalirajte pomoću KR koda***" ili "***ručno instalirajte***"

Pre početka instalacije, važno je da imate sledeće tri komponente:

- ***Jaka internet konekcija*** - Idealno je koristiti Vifi mrežu ili dobru 4G vezu
- ***Uređaj kompatibilan sa eSIM*** - Ako niste sigurni, ovde se nalazi lista kompatibilnih uređaja
- ***Uređaj nije zaključan na jednu određenu mrežu*** - Ako niste sigurni, članak je obezbeđen da vas razgovara o tome kako da odredite status "zaključan / otključan" uređaja, kliknite **ovde**

Ne zaboravite da uključite "Data Roaming" nakon instalacije!

Instalirajte pomoću "Apple Kuick Install URL"

Sa iOS 17.4 i novijim, Apple je uveo mogućnost da korisnici instaliraju svoj eSIM direktno na svoj uređaj klikom na jednostavnu vezu.

Metoda instalacije Universal Link funkcioniše dodavanjem jedinstvene SMDP + adrese i aktivacionog koda na kraju univerzalne veze.

Primer veze bi izgledao ovako:

https://esimsetup.apple.com/esim_qrcode_provisioning?carddata=LPA:1$SMDP+_Address$Activation_Code

ili

https://esimsetup.apple.com/esim_qrcode_provisioning?carddata=LPA:1$rsp.truphone.com$JQ-209U6H-6I82J5

Klikom na ovaj link sa iOS KSNUMKS (ili iznad) uređaja započinje instalacija koristeći specifične LPA informacije i bićete prebačeni direktno na ekran za instalaciju ispod.



<u>Instalirajte pomoću KR koda</u>

Na raspolaganju su dve opcije prilikom skeniranja KR koda za instaliranje eSIM-a;

Korak 1.

Ili

KSNUMKS) Otvorite kameru na uređaju > Skenirajte KR kod > dodirnite "Mobilni plan"





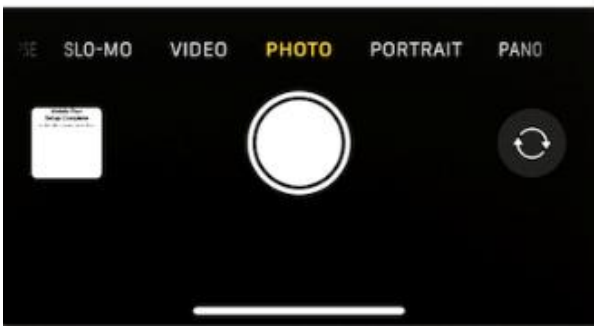

Ili

KSNUMKS) Idite na "Podešavanja" > dodirnite "Mobilni / mobilni podaci" > dodirnite "Dodaj eSIM" > dodirnite "Koristi KR kod" > skenirajte priloženi KR kod

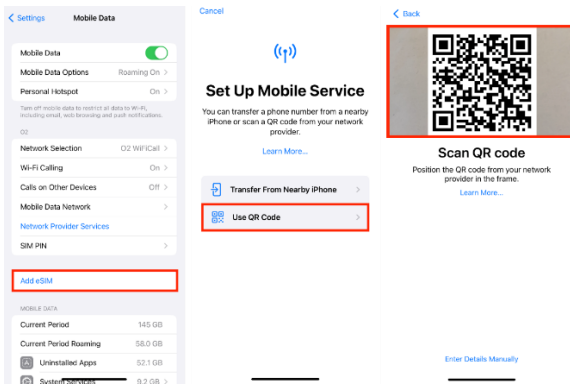

Korak 2. Dodirnite "Nastavi" > Dozvolite do 10 minuta za eSIM da se aktivira > dodirnite "Gotovo"

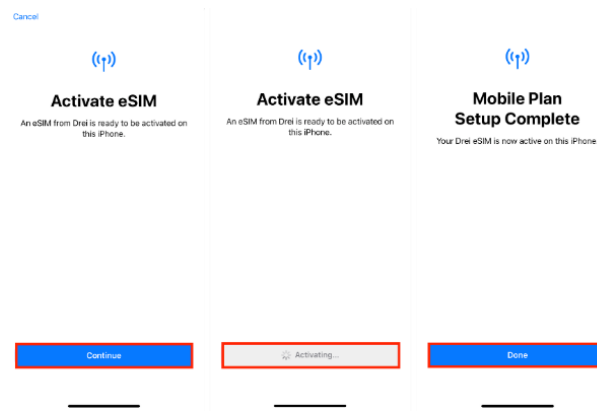

Korak 3. U ovoj fazi su na raspolaganju dve opcije, savetujemo da nastavite sa opcijom 3.1)

Ili

KSNUMKS) Dodirnite "Nastavi", a zatim pređite na **korak KSNUMKS.**

ili

KSNUMKS) Imate mogućnost da izmenite "eSIM oznaku" (naziv eSIM-a) umesto da koristite podrazumevano ime.

Ako želite da izmenite eSIM oznaku pre nego što pređete na sledeći korak;

Dodirnite ">" (strelica desne ruke) > Zatim izaberite jednu od unapred podešenih oznaka **ili** upišite ime koje želite da koristite u polje "Custom Label" > dodirnite "Gotovo" > dodirnite "Nastavi"

U ovom primeru ime esim je promenjeno u "Moj eSIM" koristeći prilagođenu kutiju za oznake.

Imajte na umu; Opcija 3.2) neće vam biti ponuđena ako imate više od jednog eSIM-a već instaliranog na vašem uređaju, tako da se prilagođena oznaka može promeniti tek nakon završetka instalacije SIM kartice.

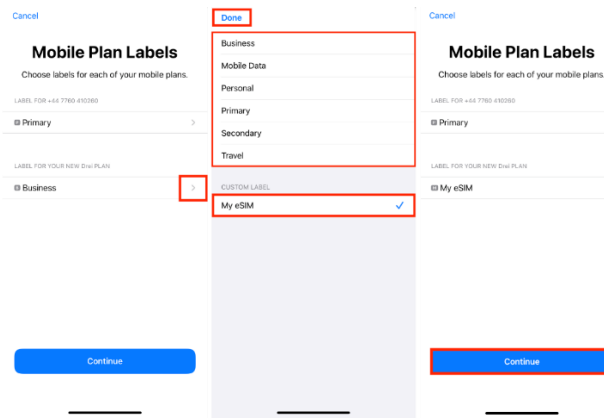

Korak 4. Konfigurišite sledeća podešavanja kao što je predloženo:

- Podesite **podrazumevanu** liniju na "Primarni" > dodirnite "Nastavi"
- Podesite **iMessage & ISight** na "Primarni" > dodirnite "Nastavi"
- Podesite **mobilne podatke** na prethodno izabranu eSIM oznaku, u ovom primeru "Moj eSIM"

Dozvoli mobilnih podataka Prebacivanje je podrazumevano isključeno, izaberite želje pomoću prekidača > dodirnite "Gotovo"

"Dozvoli prebacivanje mobilnih podataka" će omogućiti vašem uređaju da koristi mobilne podatke sa obe linije u zavisnosti od pokrivenosti i dostupnosti. Izbor možete promeniti kasnije u podešavanjima.

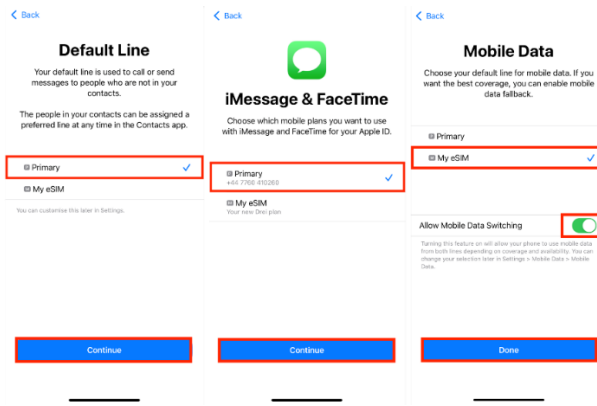

Korak 5. eSIM je sada instaliran i konfigurisan.

Važno: Prenos podataka MORA biti OMOGUĆEN kako bi eSIM da radi

Idite na "Podešavanja" > dodirnite "Mobilni / Mobilni podaci" > Izaberite željenu SIM > Pomerite prekidač na "Uključeno"

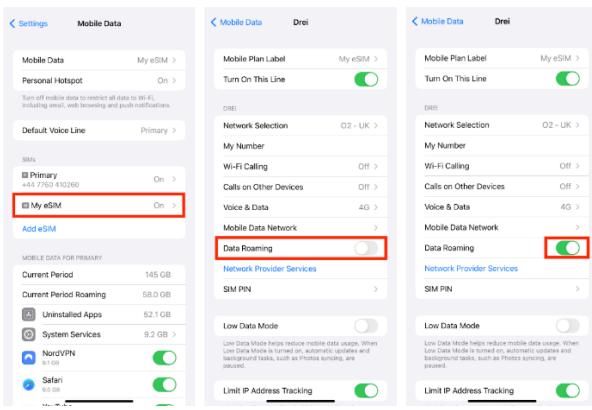

Ne zaboravite da uključite "Data Roaming" nakon instalacije!

<u>Uputstvo za instalaciju eSIM</u>

Korak 1. Idite na "Podešavanja" > dodirnite "Mobile / Cellular Data"

Korak 2. Dodirnite "Dodaj eSIM" > dodirnite "Koristi KR kod" > dodirnite "Unesite detalje ručno"

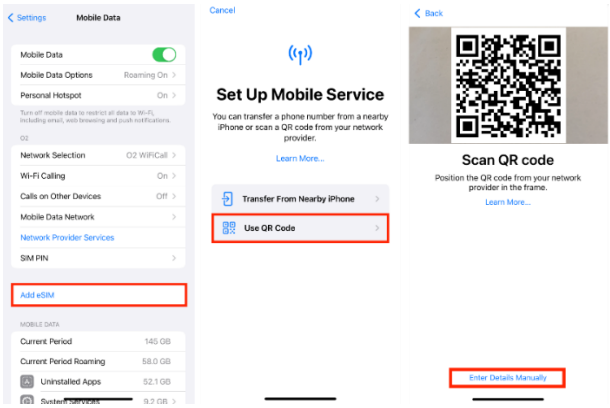

Korak 3. Unesite "SMDP adresu" i "Aktivacioni kod" pod uslovom > Dodirnite "Sledeći"

Ostavite "Potvrdni kod" prazan

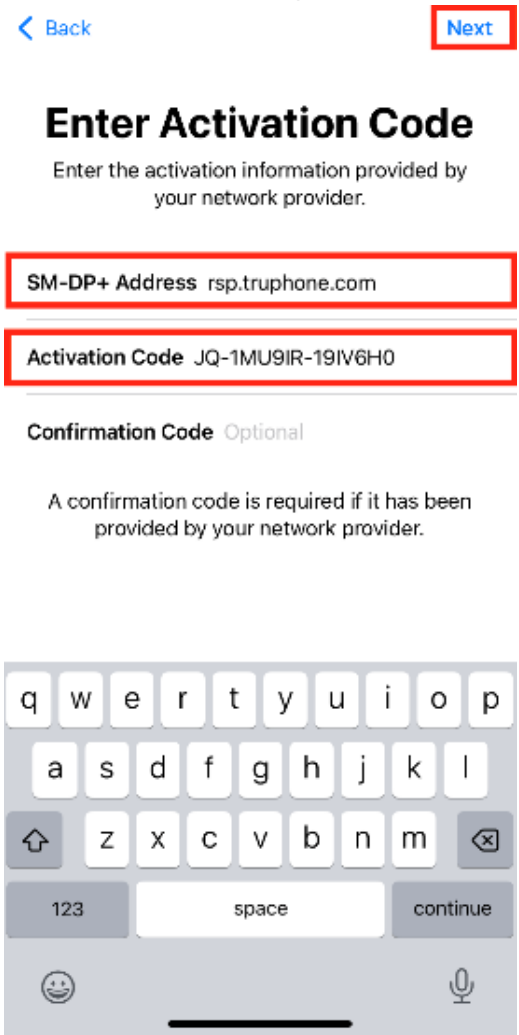

Korak 4. Dodirnite "Nastavi" > Dozvolite do 10 minuta za eSIM da se aktivira > dodirnite "Gotovo"

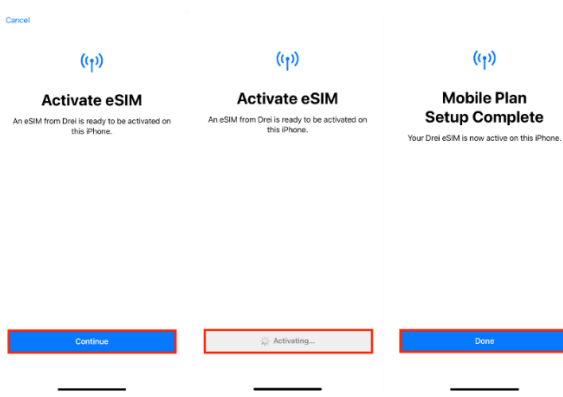

Korak 5. U ovoj fazi postoje dve opcije, savetujemo da nastavite sa opcijom 5.1)

Ili

KSNUMKS) Dodirnite "Nastavi", a zatim pređite na **korak KSNUMKS.**

ili

KSNUMKS) Imate mogućnost da izmenite "eSIM oznaku" (naziv eSIM-a) umesto da koristite podrazumevano ime.

Ako želite da izmenite eSIM oznaku pre nego što pređete na sledeći korak;

Dodirnite ">" (strelica desne ruke) > Zatim izaberite jednu od unapred podešenih oznaka **ili** upišite ime koje želite da koristite u polje "Custom Label" > dodirnite "Gotovo" > dodirnite "Nastavi"

U ovom primeru ime esim je promenjeno u "Moj eSIM" koristeći prilagođenu kutiju za oznake.

Imajte na umu; Opcija 5.2) neće vam biti ponuđena ako na uređaju već imate instalirano više od jednog eSIM-a, tako da se prilagođena oznaka može promeniti tek nakon završetka instalacije SIM kartice.

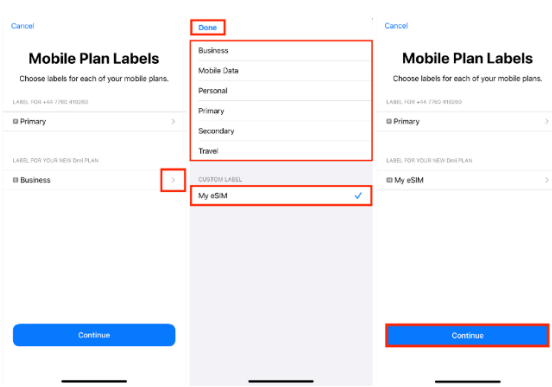

Korak 6. Konfigurišite sledeća podešavanja kao što je predloženo:

- Podesite **podrazumevanu** liniju na "Primarni" > dodirnite "Nastavi"
- Podesite **iMessage & ISight** na "Primarni" > dodirnite "Nastavi"
- Podesite **mobilne podatke** na prethodno izabranu eSIM oznaku, u ovom primeru "Moj eSIM"

Dozvoli mobilnih podataka Prebacivanje je podrazumevano isključeno, izaberite želje pomoću prekidača > dodirnite "Gotovo"

"Dozvoli prebacivanje mobilnih podataka" će omogućiti vašem uređaju da koristi mobilne podatke sa obe linije u zavisnosti od pokrivenosti i dostupnosti. Izbor možete promeniti kasnije u podešavanjima.

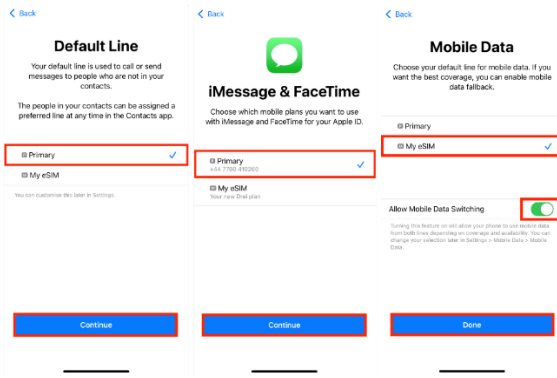

Korak 7. eSIM je sada instaliran i konfigurisan.

Važno: Prenos podataka MORA biti OMOGUĆEN kako bi eSIM da radi

Idite na "Podešavanja" > dodirnite "Mobilni / Mobilni podaci" > Izaberite željenu SIM > Pomerite prekidač na "Uključeno"

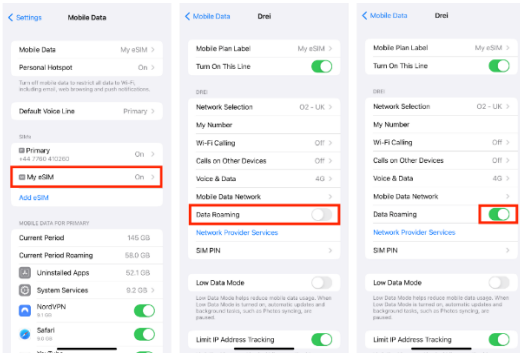
Settings
Mobile Data
Mobile Data
My eSIM
Personal Hotspot
On
Turn off mobile data to restrict all data to Wi-Fi, including email, web browsing and push notifications.
Default Voice Line
Primary
SIMs
Primary
+44 7760 410260
On
My eSIM
On
Add eSIM
MOBILE DATA FOR PRIMARY
Current Period
145 GB
Current Period Roaming
58.0 GB
Uninstalled Apps
52.1 GB
System Services
9.2 GB
NordVPN
9.1 GB
Safari
9.0 GB
Mobile Data
Drei
Mobile Plan Label
My eSIM
Turn On This Line
DREI
Network Selection
O2 - UK
My Number
Wi-Fi Calling
Off
Calls on Other Devices
Off
Voice & Data
4G
Mobile Data Network
Data Roaming
Network Provider Services
SIM PIN
Low Data Mode
Low Data Mode helps reduce mobile data usage. When Low Data Mode is turned on, automatic updates and background tasks, such as Photos syncing, are paused.
Limit IP Address Tracking
Mobile Data
Drei
Mobile Plan Label
My eSIM
Turn On This Line
DREI
Network Selection
O2 - UK
My Number
Wi-Fi Calling
Off
Calls on Other Devices
Off
Voice & Data
4G
Mobile Data Network
Data Roaming
Network Provider Services
SIM PIN
Low Data Mode
Low Data Mode helps reduce mobile data usage. When Low Data Mode is turned on, automatic updates and background tasks, such as Photos syncing, are paused.
Limit IP Address Tracking